



VFL

Closed circuit cooling towers

Principle of operation

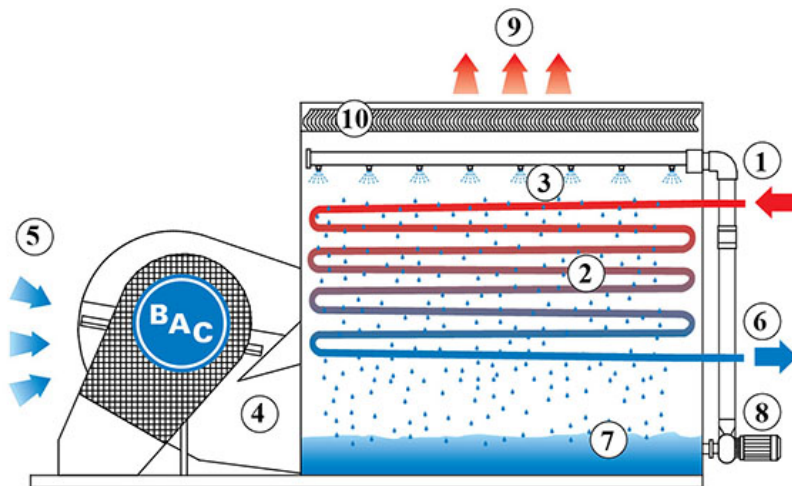

Warm process fluid (1) enters through a **heat exchange coil (2)** and gets water sprayed on by the **spray system (3)** at the top of the cooling tower. At the same time the **centrifugal fan (4)** blows ambient **air** upwards **(5)** through the tower. During operation, heat is transferred from the internal circuit coil to the water, and then to the atmosphere as a portion of the water that evaporates. The cooled fluid then **exits(6)** the unit. The tower **sump (7)** or basin collects the remaining spray water. The spray water **pump (8)** recirculates the water up to the water spray system. The warm saturated **air (9)** leaves the tower through the **drift eliminators (10)**, which remove water droplets from the air.

You want to use the VFL closed circuit cooling tower to cool your process fluid? Contact your local [BAC representative](#) for more information.