

HXC

Refrigerant condensers

Engineering data


Remark: Do not use for construction. Refer to factory certified dimensions & weights. This page includes data current at time of publication, which should be reconfirmed at the time of purchase. In the interest of product improvement, specifications, weights and dimensions are subject to change without notice.

General notes

1. Dimensional drawings show standard (right hand) arrangement can be furnished by special order.
2. Coil connection locations are approximate. Dimensions should not be used for prefabrication on the connecting piping. All coil connections are beveled for welding.
3. Shipping/ operating weights indicated are for units without accessories such as sound attenuators, discharge hoods ect. Consult factory certified prints to obtain weight additions and the heaviest section to be lifted. Operating weight shown in tables is based on total unit weight of refrigerant operating charge and basin filled to overflow level.
4. The units will be delivered in 3 different pieces, upper, middle and lower section.

Last update: 10/05/2019

Sound attenuation

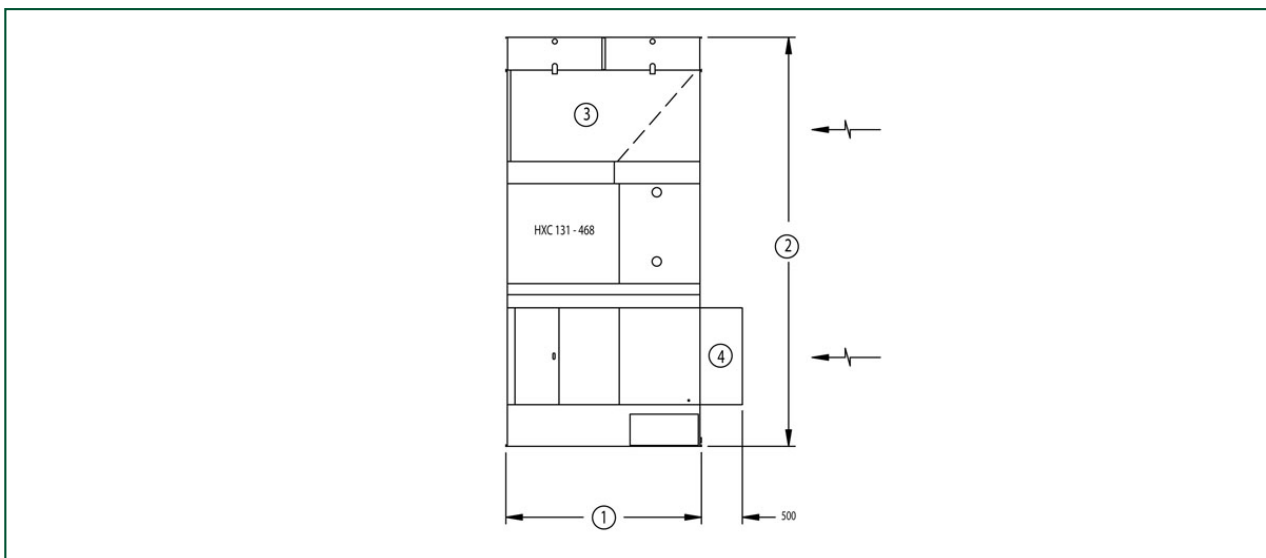

1. Unit width; 2. Unit height; 3. Insulated plenum; 4. Intake attenuator.



Model	Weight Sound Attenuator (kg)
HXC 131	130
HXC 147	130
HXC 173	175
HXC 193	175
HXC 214	250
HXC 258	250
HXC 288	250
HXC 379	375
HXC 424	375
HXC 468	375