

SP 3B D410-B - T610-B


Adiabatic cooling

Engineering data

REMARK: Do not use for construction. Refer to factory certified dimensions & weights. This page includes data current at the time of publication, which should be reconfirmed at the time of purchase. In the interest of product improvement, specifications, weights and dimensions are subject to change without notice.

Last update: 01/07/2021

SP 3B D410-B - T610-B

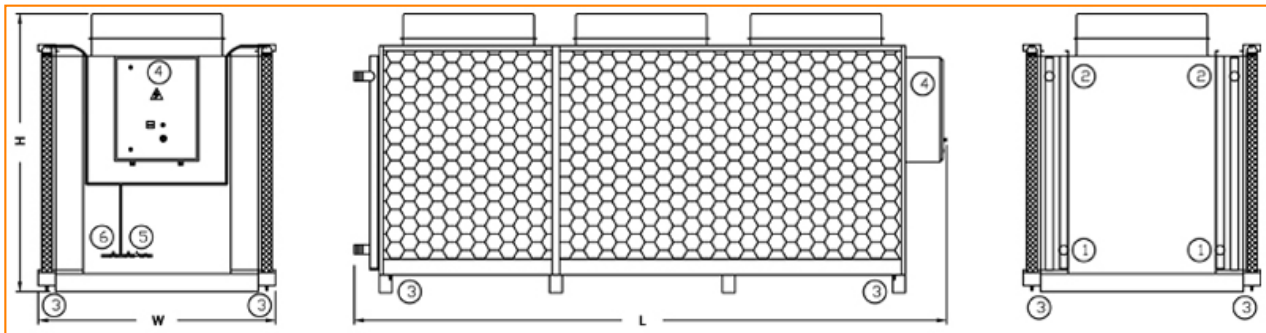

1. Fluid inlet connections; 2. Fluid outlet connections; 3. Pre-cooler water drain; 4. Electrical panel; 5. Pre-cooler city water connection; 6. Pre-cooler piping drain.

On model SP 3B D610-B the fluid-in connections are located at the opposite side of the unit.



Model	Nr. of Fans	Weights (kg)			Dimensions (mm)			Air Flow (m³/s)		Tube Internal Volume (dm³)	Surface (m²)	Connections
		Oper. Weight (kg)	Ship. Weight(kg)	Heaviest Section (kg)	L	W	H	Δ	Υ			
SP 3 B-D410-B	3	2860	2530	2530	5766	2350	2602	48.0	37.4	140.0	2388.0	2
SP 3 B-D610-B	3	3240	2830	2830	5766	2350	2602	45.75	35.7	212.0	3580.0	2
SP 3 B-H410-B	3	2860	2530	2530	5766	2350	2602	48.0	37.4	140.0	2388.0	2
SP 3 B-H610-B	3	3240	2830	2830	5766	2350	2602	45.75	35.7	212.0	3580.0	2
SP 3 B-L410-B	3	2860	2530	2530	5766	2350	2602	48.0	37.4	140.0	2388.0	2
SP 3 B-L610-B	3	3240	2830	2830	5766	2350	2602	45.75	35.7	212.0	3580.0	2
SP 3 B-M610-B	3	3240	2830	2830	5766	2350	2602	45.75	35.7	212.0	3580.0	2
SP 3 B-S410-B	3	2860	2530	2530	5766	2350	2602	48.0	37.4	140.0	2388.0	2
SP 3 B-S610-B	3	3240	2830	2830	5766	2350	2602	45.75	35.7	212.0	3580.0	2
SP 3 B-T610-B	3	3240	2830	2830	5766	2350	2602	45.75	35.7	212.0	3580.0	2