

SP 5A EC D613-E - T613-E


Dry and adiabatic cooling

Engineering data

REMARK: Do not use for construction. Refer to factory certified dimensions & weights. This page includes data current at the time of publication, which should be reconfirmed at the time of purchase. In the interest of product improvement, specifications, weights and dimensions are subject to change without notice.

Last update: 01/09/2019

SP 5A EC D613-E - T613-E

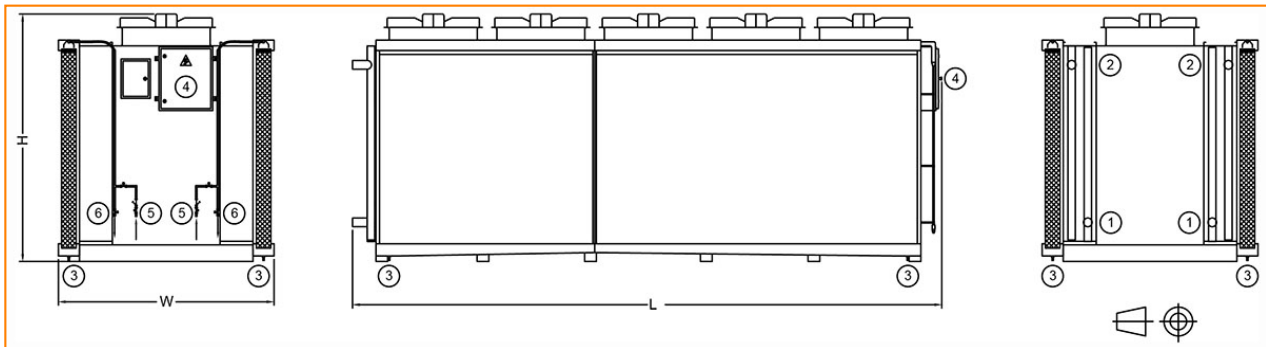

1. Fluid inlet connections; 2. Fluid outlet connections; 3. Pre-cooler water drain; 4. Electrical panel; 5. Pre-cooler city water connection; 6. Pre-cooler piping drain.
On model SP 5A EC D613-E the fluid-in connections are located at the opposite side of the unit.



Model	Nr. of Fans	Weights (kg)			Dimensions (mm)			Air Flow (m ³ /s)		Tube Internal Volume (dm ³)	Surface (m ²)	Connections
		Oper. Weight (kg)	Ship. Weight(kg)	Heaviest Section (kg)	L	W	H	Δ	Υ			
SP 5 A-EC- D613- E	5	3600	2930	2930	6216	2206	2523	36.0	36.0	424.0	3978.0	2
SP 5 A-EC- H613- E	5	3600	2930	2930	6216	2206	2523	36.0	36.0	424.0	3978.0	2
SP 5 A-EC- L613- E	5	3600	2930	2930	6216	2206	2523	36.0	36.0	424.0	3978.0	2
SP 5 A-EC- M613- E	5	3600	2930	2930	6216	2206	2523	36.0	36.0	424.0	3978.0	2
SP 5 A-EC- S613- E	5	3600	2930	2930	6216	2206	2523	36.0	36.0	424.0	3978.0	2
SP 5 A-EC- T613- E	5	3600	2930	2930	6216	2206	2523	36.0	36.0	424.0	3978.0	2